

# REGULATOR/PILOT COMBINATIONS

## DP & HDP

### Pilot-Operated Pressure Regulating Valve

Watson McDaniel reserves the right to change the designs and/or materials of its products without notice.  
©2002 Watson McDaniel Company

Revised 7/2002

## D & HD Regulating Valve with "P" Pressure Pilot

- Reduced Outlet Pressure Range:  
3-200 psig
- Inlet Pressure Max: 300 psig  
Inlet Pressure Min: 15 psig



### TYPICAL APPLICATIONS

The D-Series and HD-Series Regulator equipped with the "P" Pressure Pilot is used for reducing steam pressure in piping mains and process applications. Pilot operated regulators will maintain constant downstream pressure even when the inlet pressure to the regulator fluctuates or steam usage varies.

### FEATURES

- The "P" Pilot can maintain downstream pressure to  $\pm 1$  psig
- Optional "P5" pilot can maintain pressure to  $\pm 0.5$  psig
- Choices of three overlapping pressure ranges
- Pressure adjusting spring can be changed with regulator in-line
- Pilot is installed using four bolts
- Full port strainer and blow-down valve on pilot adapter to eliminate failure caused by contaminated steam systems
- Watson McDaniel's pilots can be used with other manufacturer's regulators

### OPTIONS

- Pressure and temperature pilots can be combined on the same regulator
- Solenoid pilot can be added for electrical on/off control of the regulator
- Can be used with solenoid and temperature pilots

### PRESSURE-ADJUSTING SPRING RANGES

Pressure	Identifying Colors
3-25 psig	yellow
20-100 psig	blue
80-200 psig	red

### MATERIALS

	D-SERIES	HD-SERIES
Body	Cast Iron	Ductile Iron
Cover	Cast Iron	Ductile Iron
Gasket	Garlock 3400	Garlock 3400
Cover Screws	Steel	Steel
Pilot Adapter	Cast Iron	Ductile Iron
Screen	Stainless Steel	Stainless Steel
Tubing	Copper	Copper
Valve Seat	Hardened SST (55 Rc)	Hardened SST (55 Rc)
Valve Disc	Hardened SST (55 Rc)	Hardened SST (55 Rc)
Diaphragm	Phosphor Bronze	Phosphor Bronze

### RECOMMENDED PRESSURE

Differential Pressure: 10 psig minimum  
Minimum Inlet Pressure: 15 psig\*

\*Minimum Inlet Pressure for Temperature Regulator: 5 psig

# REGULATOR/PILOT COMBINATIONS

## DP & HDP


### Pilot-Operated Pressure Regulating Valve

DIMENSIONS D-Series – inches / pounds									
Size	Face-To-Face			B	C*	D	E**	Weight (lbs)	
	NPT	125#	250#					NPT	FLG
1/2"	5-1/8			5-1/8	11	5-7/8	7	18	
3/4"	5-1/2			5-1/2	11	6-1/2	7-1/4	21	
1"	6-1/8			6-1/8	11	7	7-1/2	25	
1-1/4"	8-1/2			7	11-7/8	8-3/4	8	45	
1-1/2"	9-1/2			7-1/8	11-7/8	8-3/4	8-1/2	55	
2"	9-3/4	9-1/2	9-5/8	7-1/8	11-7/8	10-7/8	9	90	105
2-1/2"		10	10-5/8	8-3/4	11-7/8	11-3/4	9-1/2		135
3"		11	11-3/4	9-1/8	11-7/8	13-1/4	10		180
4"		13-3/8	13-7/8	10-3/8	11-7/8	14-3/4	11		290
6"		18-1/8	19	16	12-1/2	19-3/4	12		590

DIMENSIONS HD-Series – inches / pounds									
Size	Face-To-Face			B	C*	D	E**	Weight (lbs)	
	NPT	150#	300#					NPT	FLG
1/2"	4-3/8			5-1/2	11-7/8	6-1/2	7-3/4	18	
3/4"	4-3/8			5-1/2	11-7/8	6-1/2	7-3/4	18	
1"	5-3/8			6-1/4	11-7/8	7	7-3/4	23	
1-1/4"	7-1/4			7-3/8	11-7/8	8-3/4	8-1/4	43	
1-1/2"	7-1/4			7-3/8	11-7/8	8-3/4	8-1/4	43	
2"	7-1/2	8-1/2	9	8-1/4	11-7/8	10-7/8	8-1/2	65	85
2-1/2"		9-3/8	10	9	11-7/8	11-3/4	8-1/2		105
3"		10	10-3/4	8-7/8	11-7/8	13-1/4	9-1/2		145
4"		11-7/8	12-1/2	10-7/8	11-7/8	14-3/4	10-1/2		235
6"		15-1/8	16	14-1/8	12-1/2	19-3/4	11-3/4		470

\* For P5 Pilot: For sizes 1/2" to 1-1/2" add 2-1/2" to "C" dimension. For sizes 2" to 6" add 5" to "C" dimension.

\*\* Add 1-1/2" to "E" dimension for all sizes.

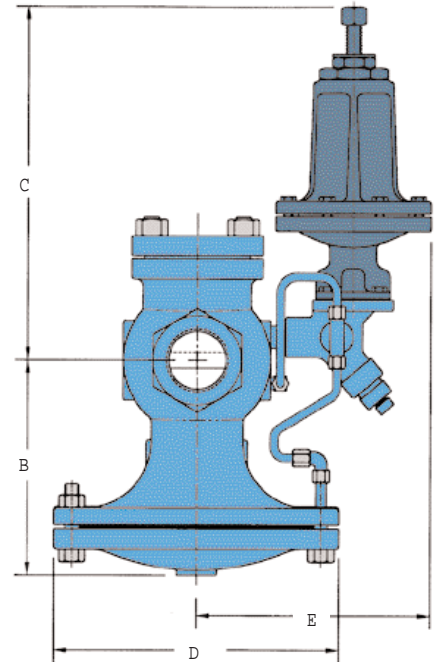

REGULATORS


### HOW TO ORDER

#### P or P5 PRESSURE PILOT

Specify: • Reduced pressure range.

#### REGULATOR BODY

Specify: • D or HD regulator body.  
 • Regulator size or capacity and pressures of steam required.  
 • End connections (threaded, 125/150/250/300# flanged).

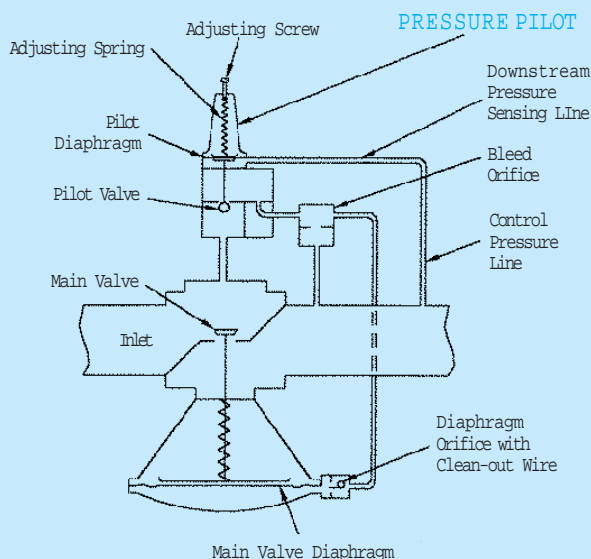

### HOW IT WORKS

The purpose of the pressure pilot is to control the operation of the pressure regulating valve. A sensing line used to detect pressure connects the pressure pilot to the downstream side of the regulator. The pressure in the sensing line is directed under the diaphragm in the pressure pilot. When the pressure in the system reaches the adjusted spring set point it pushes the diaphragm upwards against the force of the adjusting spring and closes the pilot valve. When the pilot valve is shut, steam can no longer pass through to the underside of the regulator diaphragm and the valve main closes. When the steam pressure falls below its set point, the pilot valve opens allowing steam to lift the main diaphragm and open up the regulating valve.